

EasyLED Polycarbonate Entry Light FXWP7Q

SOFTLED • WALL LIGHT • ENTRY LIGHT

The FXWP7Q general purpose entry light luminaire provides optically controlled wide spread light distribution designed to replace HID lighting systems up to 70w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings, apartment complexes and medical facilities. Mounting heights of 8 to 12 feet can be used based on light level and uniformity requirements.

HOUSING:

Die Cast Back Plate with White Powdercoat Finish. Molded UV-Stabilized Polycarbonate Front Housing. 120-277V Photocell Included.

LISTING & RATINGS:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP65 Sealed LED Compartment. ADA Compliant

FINISH:

UV-Stabilized Polycarbonate Front Housing in Black with White Powdercoat Finish Back Plate.

LENS:

SoftLED LumaLens UV-Stabilized Polycarbonate Opal Vandal-Resistant Lens Eliminates LED Hot Spots

MOUNTING OPTIONS:

Mount Directly Over a 4" Recessed Outlet Box.

EASYLED LED:

Aluminum Boards

WATTAGE:

Array: 11w; System: 13.8w; (70w HID Equivalent)

DRIVER:

Electronic Driver, 120-277V, 50/60Hz, Non-Dimmable

CONTROLS:

Factory-Installed Photocell is Internally Wired for Switching Within the Housing. Fixtures are Tested with FX Lighting Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

LIFESPAN:

L70>133,000 Hours

WARRANTY:

5-Year Warranty for -40°C to +40°C Environment.



PROJECT INFORMATION:	
Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com

EasyLED Polycarbonate Entry Light

FXWP7Q

SOFTLED • WALL LIGHT • ENTRY LIGHT

We have custom and standard manufacturing options. Use this form to build your part number or reach out to our sales team for assistance.

GET YOUR PRODUCTS FASTER WITH OUR QUICK SHIP PROGRAM

Multiple USA locations = 98-3-1 Quick Ship Program
98% Fill Rate – 3 Day Lead Time – 1 Piece Minimum Order

ORDER EXAMPLE

FXWP7Q	F	1X11	U	5K	L	B
Series	Optics	Wattage	Driver	CCT	Lens	Color


ORDER CONFIGURATION

Series	Optics	Wattage	Driver	CCT	Lens	Color
FXWP7Q=EasyLED Polycarbonate Entry Light	F=Type IV	1X11=11w	U=120-277V	4K=4000K 5K=5000K	L=SoftLED LumaLens Opal UV-Stabilized Polycarbonate Outer Conical Lens	B=Black
FXWP7Q	F	1X11	U		L	B

FXWP7Q PHOTOMETRIC DATA

Lumen Package	Optic	Wattage (Catalog Logic)	
		Input Watts	Delivered Lumens
FXWP7Q	Type IV	11W (1X11)	1,490
		14W	B0-U3-G2

FXWP7Q DISTRIBUTION

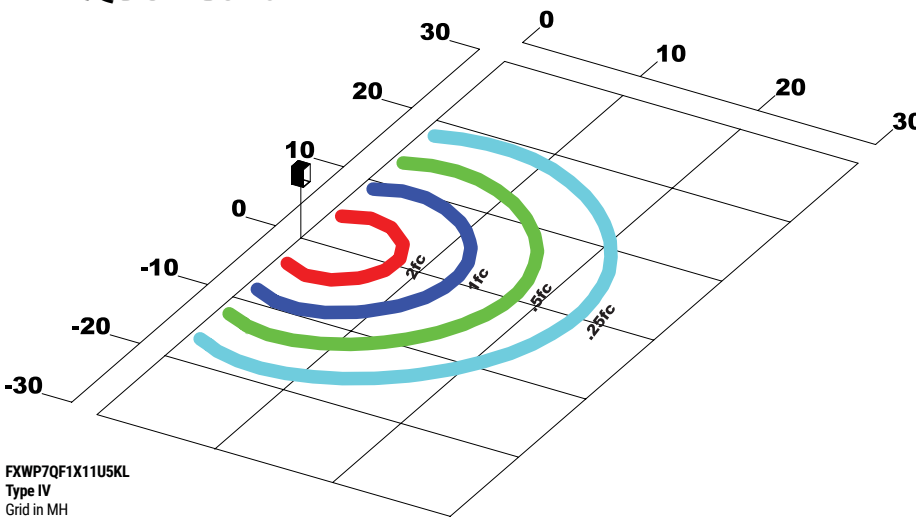


FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com

EasyLED Polycarbonate Entry Light

FXWP7Q

SOFTLED • WALL LIGHT • ENTRY LIGHT

FXWP7Q DIMENSIONAL DATA

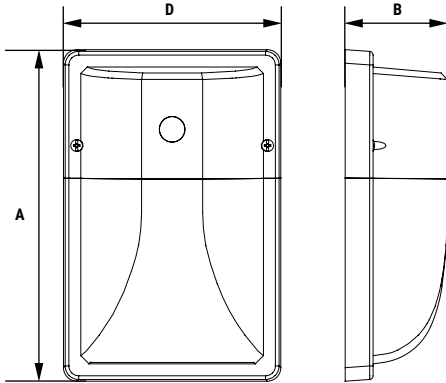

FXWP7Q Dimensions

Width (D)	5¼" (136mm)
Depth (B)	2½" (64mm)
Height (A)	8¼" (207mm)