

# Die-Cast Aluminum Exit Sign

DCESX

EMERGENCY & EXIT LIGHTING

The FX Lighting Die-cast Aluminum Exit Sign provides superior aesthetics required for specification grade applications such as medical facilities and Class A office spaces.

## HOUSING:

Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes. Field selectable knockout Chevron directional indicators. Unique design allows double-face conversion in the field. Quick-snap face plate enclosure.

## LISTINGS & RATINGS:

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. UL Listed for damp locations (0°C - 50°C). Certified to CEC under Title 20 Regulations.

## MOUNTING:

Aluminum mounting canopy included for top or end mount. Universal knockout pattern on back plate for wall mount.

## ILLUMINATION:

Aluminum mounting canopy included for top or end mount. Universal knockout pattern on back plate for wall mount.

## ELECTRICAL:

Dual 120/277V. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 4.8V long life, maintenance-free, rechargeable NiCd battery. Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## LIFESPAN:

LED long life hours.

## WARRANTY:

Five year warranty on all electronics and housing. Battery pro-rated for five years.



### PROJECT INFORMATION:

Project Name: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

Complete Catalog #: \_\_\_\_\_ Date: \_\_\_\_\_

Comments: \_\_\_\_\_  
\_\_\_\_\_

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com

# Die-Cast Aluminum Exit Sign

DCESX

EMERGENCY & EXIT LIGHTING

We have custom and standard manufacturing options. Use this form to build your part number or reach out to our sales team for assistance.

## ORDER EXAMPLE

<b>DCESX</b>	<u>No. of Heads</u> 2	<u>Letter Color</u> R	<u>Housing Color</u> W	<u>Face Panel</u> W	<u>Battery</u> EM	<u>Options</u> SDT
Series						

## ORDER CONFIGURATION


Series	No. of Heads	Letter Color	Housing Color	Face Panel	Battery	Options
DCESX=Die-cast Aluminum Exit Sign	1=Single Face 2=Double Face 3=Single/Double Face	R=Red G=Green	W=White B=Black A=Aluminum	W=White B=Black A=Aluminum	(blank)=AC Only EM=Battery Backup	SDT=Self-Diagnostics <sup>1</sup> 2C-120V=Dual Circuit with 120V Input <sup>2</sup> 2C-277V=Dual Circuit with 277V Input <sup>2</sup> TP=Tamper-Proof USA=Assembled in USA
<b>DCESX</b>						

NOTES: 1. Available only with EM units. 2. Available only with AC units.

## DCESX ELECTRICAL INFORMATION

Model Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
DCESX – Red	3.2	3.6	0.031	0.019
DCESX – Green	3.8	4.4	0.033	0.017

## DCESX DIMENSIONAL DATA

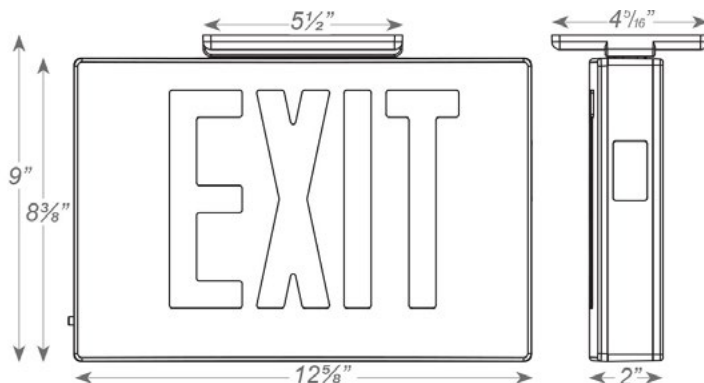

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com