

Thermoplastic LED Combination Exit/Emergency Light

EZXSC

EMERGENCY & EXIT LIGHTING

The FX Lighting Thermoplastic LED Exit/Emergency Light design provides energy efficient, code-compliant signage with fully adjustable LED lamp heads for use in applications such as corridors, aisles and above doorways.

HOUSING:

Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish. Aesthetically pleasing, curved face, rounded corner design. EZ snap-out Chevron directional indicators.

LISTINGS & RATINGS:

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. UL Listed for damp locations (0°C - 40°C). Certified to CEC under Title 20 Regulations.

MOUNTING:

EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.

ILLUMINATION:

Long-lasting energy efficient Red or Green LED Exit sign illumination. Adjustable long lasting and efficient 1.0 watt, (8 LEDs x 0.125 watt per head), ultra-bright white LED lamp heads. High performance chrome-plated metallized reflector and plastic lens provides optimal light distribution and center-to-center spacing.

ELECTRICAL:

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. Includes 9.6 volt, long life, maintenance-free, rechargeable Ni-Cd battery. Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours. Remote capacity available as an option.

LIFESPAN:

LED long life hours.

WARRANTY:

Five year warranty on all electronics and housing. Battery pro-rated for five year.



PROJECT INFORMATION:

Project Name: _____ Fixture Type: _____

Complete Catalog #: _____ Date: _____

Comments: _____

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com

Thermoplastic LED Combination Exit/Emergency Light

EZXSC

EMERGENCY & EXIT LIGHTING

We have custom and standard manufacturing options. Use this form to build your part number or reach out to our sales team for assistance.

ORDER EXAMPLE

EZXSC

Series

No. of Heads

2

Housing Color

W

R

Letter Color

SDT

Options

ORDER CONFIGURATION

Series	No. of Heads	Letter Color	Housing Color	Options
EZXSC=Thermoplastic LED Combination Exit/Emergency Light	2=Universal Single/Double Face	R=Red G=Green	W=White B=Black	RC=Remote Capacity HL=High Lumen LED NH=No Lamp Heads SDT=Self-Diagnostics CUSTOM=Custom Wording
EZXSC	2			


EZXSC ELECTRICAL INFORMATION

Model Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EZXSC - Red with no options	3.7	3.8	0.04	0.02
EZXSC - Green with no options Green with RC option	3.0	3.2	0.03	0.014
EZXSC - Red with RC option	3.4	3.6	0.033	0.015
EZXSC - Red or Green with SDT or RC-SDT options	5.2	5.7	0.046	0.022

EZXSC REMOTE LAMP COMPATABILITY

Model Number	Battery	Remote Capacity	Compatible Remote Head Family	
			EZRH-MV	
EZXSC-RC	3.6V	1.5W	X	
EZXSC-NH	3.6V	1.5W	X	
EZXSC-RC NH	3.6V	3.0W	X	

EZXSC DIMENSIONAL DATA

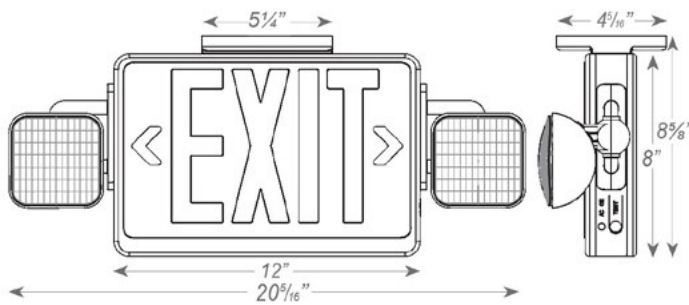

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com