

EasyLED Blade

FXBLD

NSF 2 • IP66 • COLD STORAGE • LINEAR HIGH-BAY



The FX Lighting Blade FXBLD2, FXBLD4, and FXBLD8 pendant and ceiling mount linear LED luminaire provides controlled illumination for general and task lighting designed for the harsh environments found in food processing and heavy manufacturing facilities. The Blade luminaire utilizes high efficiency LED light sources to reduce maintenance and lower energy costs. These high-quality durable fixtures are used in food and beverage processing, meat and poultry processing, livestock agricultural facilities, heavy industrial, and manufacturing facilities. Typical lighting applications include meat and poultry processing, food and beverage processing, cold storage, harsh environment industrial, vehicle wash facilities, pharmaceutical and scientific labs. Mounting heights of 8 to 25 feet can be used based on light level and uniformity requirements.

HOUSING:

Heavy-Duty Extruded and Die Cast Aluminum Housing construction with silicone gaskets and stainless-steel fasteners. Drivers, sensors, and battery backup are mounted on modular internal trays for easy maintenance.

LISTING S & RATINGS:

ETL: Listed for Wet Locations, ANSI/UL 1598, 8750. ETL Sanitation certified to National Sanitation Foundation ANSI NSF2, Food Splash Zone. IP66 Sealed LED Compartment, Pressure wash rated to 1400 PSI.

FINISH:

Powdercoat Finish Over a Chromate Conversion Coating.

LENS:

Clear UV-Stabilized Polycarbonate or Optional DR Acrylic Lens. Medium Distribution (70° Beam) or Wide Distribution (110° Beam) available.

MOUNTING OPTIONS:

Pendant Mount or Use Optional Stainless Steel Adjustable wall/Ceiling Bracket (Field Installed) available.

EASYLED LED:

Aluminum Boards

WATTAGES:

FXBLD2 – 2FT – 25w, 35w, or 50w Array
FXBLD4 – 4FT – 50w, 75w, or 100w Array
FXBLD8 – 8FT – 150w or 200w Array

DRIVER:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2KV to 6kV depending on wattage. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

CONTROLS:

Fixtures Ordered with Factory-Installed Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with FX Lighting Controls and May Not Function Properly with Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

LIFESPAN:

L70 > 188,000 Hours

WARRANTY:

5-Year Warranty for -40°C to +55°C Environment.

See Page 5 for Projected Lumen Maintenance Table.



BLADE FXBLD 4FT SHOWN
2FT AND 8 FT AVAILABLE

Shown with Optional
Internal Microwave Sensor



NSF 2 – FOOD SPLASH ZONE

An ETL Sanitation Mark on Food Service Equipment indicates that equipment is tested to ANSI/NSF 2 is fit for use in the production of food intended for human consumption, or the equipment is fit for use in an environment where food intended for human consumption is produced.

PROJECT INFORMATION:	
Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com

EasyLED Blade

FXBLD

NSF 2 • IP66 • COLD STORAGE • LINEAR HIGH-BAY



We have custom and standard manufacturing options. Use this form to build your part number or reach out to our sales team for assistance.

GET YOUR PRODUCTS FASTER WITH OUR QUICK SHIP PROGRAM

Multiple USA locations = 98-3-1 Quick Ship Program
98% Fill Rate – 3 Day Lead Time – 1 Piece Minimum Order

STANDARD MODELS ORDER EXAMPLE

<u>FXBLD8Q</u> Series	<u>Optics</u> F	<u>1X200</u> Wattage	<u>Driver</u> U	<u>5K</u> CCT	<u>Lens</u> CA	<u>W</u> Color	<u>Options</u> SP
--------------------------	--------------------	-------------------------	--------------------	------------------	-------------------	-------------------	----------------------

2 FOOT BLADE (FXBLD2Q)



Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
FXBLD2Q=2 FT Blade EasyLED Food Processing Fixture	F=Medium Beam 70° Optics W=Wide Beam 110° Optics <i>*See Page 5 for Distribution Information.</i>	1X25=25W 1X35=35W 1X50=50W	U=120-277V	4K=4000K 5K=5000K	CP=Clear Polycarbonate* CA=Clear DR Acrylic <i>*Not recommended for Alkaline Industrial Cleaners.</i>	W=White	SF=Single Fuse* DF=Double Fuse* SP=10 KV Surge Protector* SP2=20 KV Surge Protector* S3=Internal Microwave Sensor with Dimming for Mounting Heights of 25' or less BU=Battery Backup, 90 Minutes* <i>*120-277V Models Only.</i>
FXBLD2Q			U			W	

Order Information Example: FXBLD2QM1X50U5KCPW

4 FOOT BLADE (FXBLD4Q)



Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
FXBLD4Q=4 FT Blade EasyLED Food Processing Harsh Environment Linear Pendant Fixture	F=Medium Beam 70° Optics W=Wide Beam 110° Optics <i>*See Page 5 for Distribution Information.</i>	1X50=50W 1X75=75W 1X100=100W	U=120-277V H=347-480V	4K=4000K 5K=5000K	CP=Clear Polycarbonate* CA=Clear DR Acrylic <i>*Not recommended for Alkaline Industrial Cleaners.</i>	W=White	SF=Single Fuse* DF=Double Fuse* SP=10 KV Surge Protector* SP2=20 KV Surge Protector* S3=Internal Microwave Sensor with Dimming for Mounting Heights of 25' or less BU=Battery Backup, 90 Minutes* <i>*120-277V Models Only.</i>
FXBLD4Q						W	

Order Information Example: FXBLD4QW1X75U4KCAW

8 FOOT BLADE (FXBLD8Q)



Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
FXBLD8Q=8 FT Blade EasyLED Food Processing Harsh Environment Linear Pendant Fixture	F=Medium Beam 70° Optics W=Wide Beam 110° Optics <i>*See Page 5 for Distribution Information.</i>	1X150=150W 1X200=200W	U=120-277V H=347-480V	4K=4000K 5K=5000K	CP=Clear Polycarbonate* CA=Clear DR Acrylic <i>*Not recommended for Alkaline Industrial Cleaners.</i>	W=White	SF=Single Fuse* DF=Double Fuse* SP=10 KV Surge Protector* SP2=20 KV Surge Protector* S3=Internal Microwave Sensor with Dimming for Mounting Heights of 25' or less BU=Battery Backup, 90 Minutes* <i>*120-277V Models Only.</i>
FXBLD8Q						W	

Order Information Example: FXBLD8QM1X150U5KCPW

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com

EasyLED Blade

FXBLD

NSF 2 • IP66 • COLD STORAGE • LINEAR HIGH-BAY



ACCESSORIES & REPLACEMENT PARTS:

MOUNTING ACCESSORIES

(Order Separately, Field Installed)

Options	Description
FXBLDBSS	Blade Surface Mounting Bracket (Includes 2)



FXBLDBSS
One Bracket Mounts to Each End.

ACCESSORIES

(Order Separately, Field Installed)

Options	Description
FXP17122	Remote Programming Tool for FXP17121



FXP17122

REPLACEMENT PARTS

(Order Separately, Field Installed)

Options	Description
FXP17121	Internal Microwave Sensor with Dimming & Remote Programming, 120-277V Only. See FXP17121 Spec. Page for Details.

For Replacement Battery Backup, see the FX Lighting LED Battery Backup Specification Sheet.



FXP17121

BLADE PHOTOMETRIC DATA

		FXBLD2Q - 2FT			FXBLD4Q - 4FT			FXBLD8Q - 8FT	
Wattage (Catalog Logic)		25W (1X25)	35W (1X35)	50W (1X50)	50W (1X50)	75W (1X75)	100W (1X100)	150W (1X150)	200W (1X200)
Input Watts		25.0	33.0	49.6	49.6	75.5	99.1	151.1	198.3
Beam	CCT	Delivered Lumens							
M = Medium - 70° Beam	4000K	4,109	5,424	8,152	8,152	12,409	16,288	22,924	30,007
	5000K	4,212	5,559	8,356	8,356	12,719	16,695	23,497	30,757
W = Wide - 110° Beam	4000K	4,028	5,317	7,992	7,992	12,165	15,968	22,630	30,640
	5000K	4,129	5,450	8,192	8,192	12,469	16,367	23,196	31,406

BLADE PROJECTED LUMEN MAINTENANCE

Data shown for 5000 CCT		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	50W - FXBLD2Q 100W - FXBLD4Q 200W - FXBLD8Q	1.00	0.96	0.92	0.88	188,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.96	0.91	0.87	174,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.96	0.91	0.87	117,000

NOTES:

- Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
- Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com


EasyLED Blade

FXBLD


NSF 2 • IP66 • COLD STORAGE • LINEAR HIGH-BAY




BLADE PHOTOMETRIC DATA:

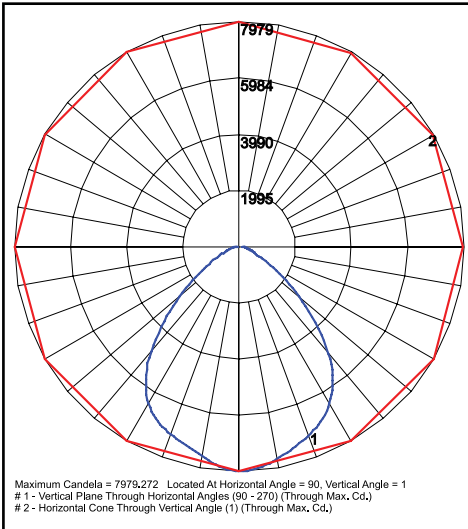


FXBLD4QM1X100U4K
Grid in feet, Mounting Height = 25 ft.

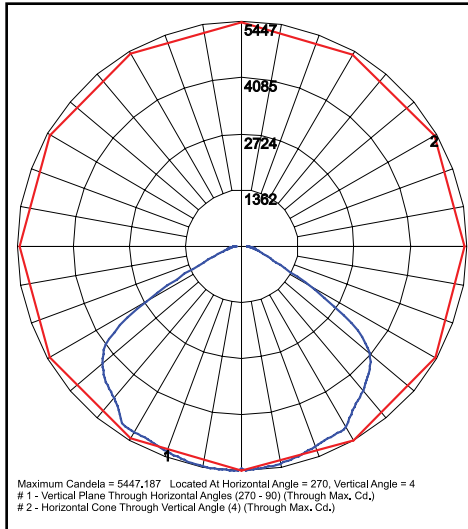

FXBLD4QW1X100U4K
Grid in feet, Mounting Height = 25 ft.

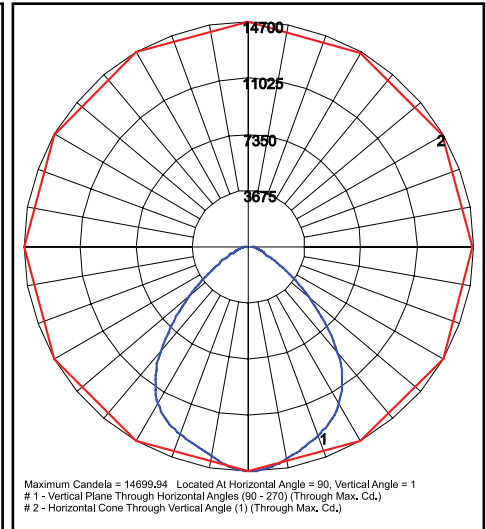

FXBLD8QM1X200U4K
Grid in feet, Mounting Height = 25 ft.

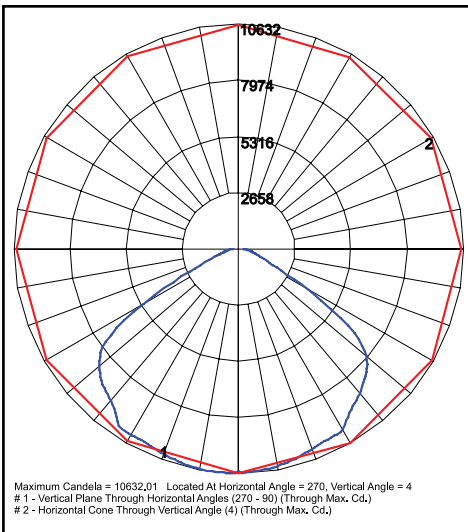

FXBLD8QW1X200U4K
Grid in feet, Mounting Height = 25 ft.

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com


EasyLED Blade

FXBLD

NSF 2 • IP66 • COLD STORAGE • LINEAR HIGH-BAY




2FT BLADE (FXBLD2Q) DIMENSIONAL DATA

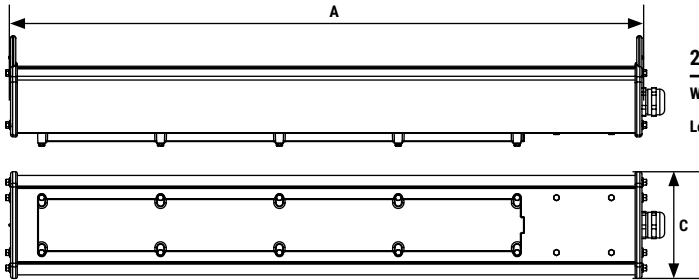

2FT BLADE (FXBLD2Q) Dimensions

Width (C)	4.1" (103mm)
Length (A)	24" (610mm)


4FT BLADE (FXBLD4Q) DIMENSIONAL DATA

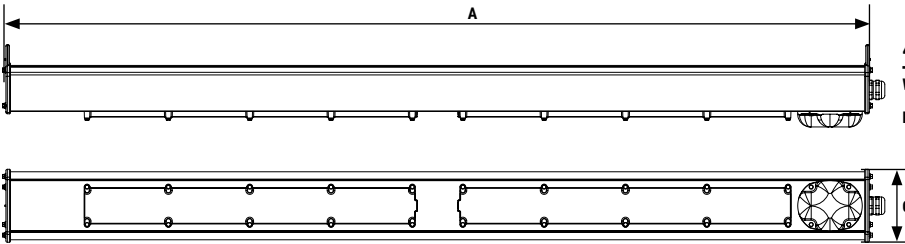

4FT BLADE (FXBLD4Q) Dimensions

Width (C)	4.1" (103mm)
Length (A)	48" (1,219mm)


8FT BLADE (FXBLD8Q) DIMENSIONAL DATA

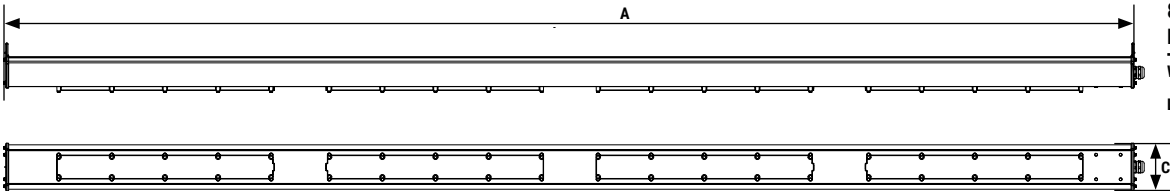

8FT BLADE (FXBLD8Q) Dimensions


Width (C)	4.1" (103mm)
Length (A)	96" (2,438mm)

END CAPS DIMENSIONAL DATA



End Cap Dimensions

Heights (B)	4.1" (104mm)
-------------	--------------



End Cap with Microwave Sensor Dimensions

Heights (B)	4.1" (104mm)
-------------	--------------

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com