

Compact Wet Location Polycarbonate Exit Sign

WEZXS

EMERGENCY & EXIT LIGHTING



The FX Lighting Compact Wet Location Polycarbonate Exit sign design provides an ideal solution for interior or exterior applications in which the sign has direct exposure to water or moisture.

HOUSING:

5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish. High-impact resistant, UL-stabilized polycarbonate clear lens. Corrosion-resistant with engineering grade silicone gasket.

LISTINGS & RATINGS:

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. UL Listed for wet locations (-20°C- 50°C). Certified to CEC under Title 20 Regulations.

MOUNTING:

Polycarbonate mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount. Knockouts provided for conduit feed applications.

ILLUMINATION:

Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL:

Dual 120/277V. Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery). 4.8V long life, maintenance-free, rechargeable NiCd battery. Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

LIFESPAN:

LED long life hours.

WARRANTY:

Five year warranty on all electronics and housing. Battery pro-rated for five years.



PROJECT INFORMATION:

Project Name: _____ Fixture Type: _____

Complete Catalog #: _____ Date: _____

Comments: _____

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com

Compact Wet Location Polycarbonate Exit Sign

WEZXS

EMERGENCY & EXIT LIGHTING

We have custom and standard manufacturing options. Use this form to build your part number or reach out to our sales team for assistance.

ORDER EXAMPLE

WEZXS	<u>No. of Heads</u> 2	<u>Letter Color</u> R	<u>Housing Color</u> W	<u>Battery</u> EM-CW	<u>Options</u> SDT
Series		Letter Color		Battery	

ORDER CONFIGURATION


Series	No. of Heads	Letter Color	Housing Color	Battery	Options
WEZXS=Compact Wet Location Polycarbonate Exit Sign	1=Single Face 2=Double Face	R=Red G=Green	W=White (with White Faceplate) B=Black (with Black Faceplate) G=Gray (with White Faceplate)	(blank)=AC Only EM-CW=Battery Backup (Cold Weather Standard)	SDT=Self-Diagnostics ¹ 2C=Dual Circuit Operation ² TP=Tamper Proof Screws CUSTOM=Custom Wording
WEZXS					

NOTES: 1. Available only with EM units. 2. Available only with AC units.

WEZXS ELECTRICAL INFORMATION

Model Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
WEZXS - Red or Green (AC Only)	2.7	2.7	0.025	0.011
WEZXS - Red or Green (AC Only with 2C option)	3.3	3.4	0.030	0.014
WEZXS - Red or Green (Battery Backup)	2.4	2.4	0.023	0.011

WEZXS DIMENSIONAL DATA

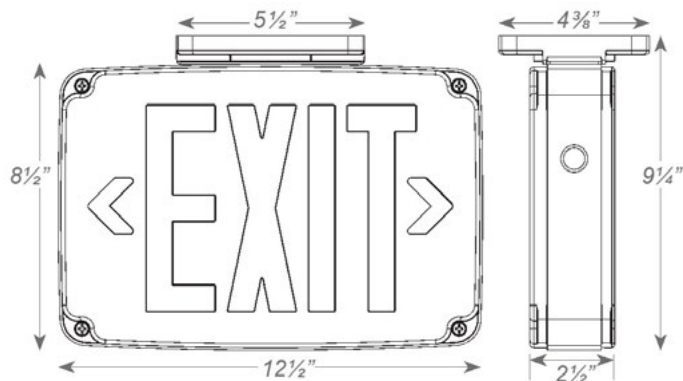

FXLSolutions.com • (800) 533-2789 • info@FXLSolutions.com